

Personal scale **KERN MPB(SK)**


Personal floor scale with BMI function



KERN MPB-P
with stand

KERN MPB
with free-standing
display device

Your KERN specialist dealer:

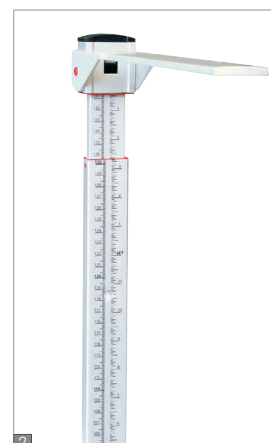

Features

- Sturdy steel weighing plate with a non-slip and wear-resistant surface
- For easy and hygienic cleaning
- Secure and non-slip positioning with rubber feet
- Vibration-free weighing: Vibrations are filtered out so that a stable weight is obtained, ideal for restless patients
- Data hold function: When the weighing value remains unchanged the weight indicated on the display is automatically „frozen“ until the HOLD key is pressed. This leaves sufficient time to look after the patient and then read the weight in peace
- Simple and convenient 4-key operation
- BMI function to determine normal weight/surplus weight
- Wall mount for the display device, only for models without a stand
- Battery- or mains-powered

Technical data

- LCD display, digit height 25 mm
- Dimensions of weighing plate WxDxH 315x300x60 mm
- Dimensions of display device WxDxH 210x110x50 mm
- Only MPB-P: Overall dimensions (incl. stand) WxDxH 315x440x1010 mm
- Cable length of display device (only for models without a stand) approx. 120 cm
- Battery operation possible, 6 x 1.5V AA, not included, operating time up to 170 h
- Mains adapter (external) included
- Net weight MPB approx. 4.6 kg; MPB-P approx. 6.4 kg

Accessories

- **1** Sturdy transport case to protect and store the scale, only for model without a stand, **KERN MPS-A07**
- **2** Mechanical measuring stick, measuring range: 60 – 200 cm, can be screwed onto the column (from the front or the back) (MPS-PM) or wall-mounted, or wall-mounted, **KERN MSF 200**
- Protective working cover over the display device, **KERN EOB-A02**

STANDARD



OPTION



Model	Weighing range	Readout	Option	
			DKD Calibr.	Certificate
KERN	[Max] kg	[d] kg	DKD KERN	
MPB 300K100	300	0,1	963-129	
MPB 300K100P	300	0,1	963-129	

Pictograms:



Vibration-free weighing:

Vibrations are filtered out so that a stable weight is obtained.



Battery operation:

Ready for battery operation. The battery type is specified for each device.



Mains adapter:

230V/50Hz in standard version for Germany. On request GB, AUS or USA version.



Package shipment:

The time required to manufacture the product internally is shown in days in the pictogram.



Warranty:

The warranty period is shown in the pictogram.



DKD calibration possible:

The time required for DKD calibration is shown in days in the pictogram.